



Our range of systems are prefabricated to meet your design, cost and production requirements.


## BATHROOM POD MANUFACTURERS

For use in bathroom pods we have developed our **PROFAB BP** prefabricated membrane system.

Our system has been design to reduce production time from conventional methods, with each membrane prefabricated to your production requirement removing the need for several coats of liquid sealants.

Following initial consultation we design and prefabricate the insert membrane. The prefabricated membrane is then simply bonded into the unit and tiled over to create a high integrity vapour seal.

### Typical bathroom pod cut through

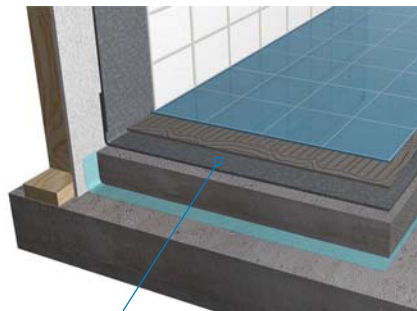


**PROFAB BP** membrane

**PROFAB** supplies all related adhesives.

We also supply **PROFAB VT** temporary waterproofing for completed units whilst in transit or storage.

The **PROFAB BP** system provides the following benefits:

- High integrity water and vapour seal
- Reduces production times of pods
- No downtime waiting for the conventional liquid sealants to dry
- Improved specification over liquid products
- Continuity of waterproofing
- Flexibility of design
- Warranty assurance
- NBI Technical approved product

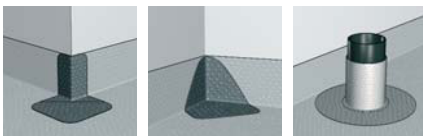

Membrane provides continuity of waterproofing



**PROTAN (UK) Head Office**  
2 Alexandra Terrace, Alexandra Road  
Aldershot, Hampshire GU11 3HU

tel: +44 (0)1252 338378  
fax: +44 (0)1252 345300

[www.protan.co.uk](http://www.protan.co.uk)